

## eXLink plug 4-pole



Plastic




Metal



with padlocking facility

### Ordering key eXLink plug 4-pole

# GHG 571 7XXX RXX0X

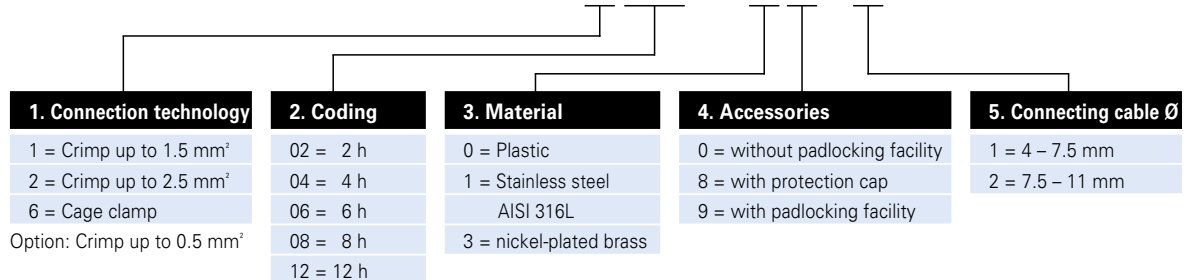

### Ordering details

Voltage	No. of poles	Coding	Power connection	Connecting cable Ø 4 – 7.5 mm Order No.	7.5 – 11 mm Order No.
<b>Plug made of plastic</b>					
BUS	3-pol + PA	2 h	Crimp up to 1.5 mm <sup>2</sup>	GHG 571 7102 R0001	<b>GHG 571 7102 R0002</b>
BUS	3-pol + PA	2 h	Cage clamp	GHG 571 7602 R0001	<b>GHG 571 7602 R0002</b>
110 V AC	2-pol + PE	4 h	Crimp up to 1.5 mm <sup>2</sup>	GHG 571 7104 R0001	<b>GHG 571 7104 R0002</b>
110 V AC	2-pol + PE	4 h	Crimp up to 2.5 mm <sup>2</sup>	GHG 571 7204 R0001	<b>GHG 571 7204 R0002</b>
110 V AC	2-pol + PE	4 h	Cage clamp	GHG 571 7604 R0001	<b>GHG 571 7604 R0002</b>
230 V AC	2-pol + PE	6 h	Crimp up to 1.5 mm <sup>2</sup>	GHG 571 7106 R0001	<b>GHG 571 7106 R0002</b>
230 V AC	2-pol + PE	6 h	Crimp up to 2.5 mm <sup>2</sup>	GHG 571 7206 R0001	<b>GHG 571 7206 R0002</b>
230 V AC	2-pol + PE	6 h	Cage clamp	GHG 571 7606 R0001	<b>GHG 571 7606 R0002</b>
24 V DC	4-pol	8 h	Crimp up to 1.5 mm <sup>2</sup>	GHG 571 7108 R0001	<b>GHG 571 7108 R0002</b>
24 V DC	4-pol	8 h	Crimp up to 2.5 mm <sup>2</sup>	GHG 571 7208 R0001	<b>GHG 571 7208 R0002</b>
230 V AC	4-pol	12 h	Crimp up to 2.5 mm <sup>2</sup>	GHG 571 7210 R0001	<b>GHG 571 7210 R3002</b>
<b>Plug made of nickel-plated brass</b>					
BUS	3-pol + PA	2 h	Crimp up to 1.5 mm <sup>2</sup>	GHG 571 7102 R3001	<b>GHG 571 7102 R3002</b>
BUS	3-pol + PA	2 h	Cage clamp	GHG 571 7602 R3001	<b>GHG 571 7602 R3002</b>
110 V AC	2-pol + PE	4 h	Crimp up to 1.5 mm <sup>2</sup>	GHG 571 7104 R3001	<b>GHG 571 7104 R3002</b>
110 V AC	2-pol + PE	4 h	Crimp up to 2.5 mm <sup>2</sup>	GHG 571 7204 R3001	<b>GHG 571 7204 R3002</b>
110 V AC	2-pol + PE	4 h	Cage clamp	GHG 571 7604 R3001	<b>GHG 571 7604 R3002</b>
230 V AC	2-pol + PE	6 h	Crimp up to 1.5 mm <sup>2</sup>	GHG 571 7106 R3001	<b>GHG 571 7106 R3002</b>
230 V AC	2-pol + PE	6 h	Crimp up to 2.5 mm <sup>2</sup>	GHG 571 7206 R3001	<b>GHG 571 7206 R3002</b>
230 V AC	2-pol + PE	6 h	Cage clamp	GHG 571 7606 R3001	<b>GHG 571 7606 R3002</b>
<b>Plug made of stainless steel</b>					
BUS	3-pol + PA	2 h	Crimp up to 1.5 mm <sup>2</sup>	GHG 571 7102 R1001	<b>GHG 571 7102 R1002</b>
BUS	3-pol + PA	2 h	Cage clamp	GHG 571 7602 R1001	<b>GHG 571 7602 R1002</b>
110 V AC	2-pol + PE	4 h	Crimp up to 1.5 mm <sup>2</sup>	GHG 571 7104 R1001	<b>GHG 571 7104 R1002</b>
110 V AC	2-pol + PE	4 h	Crimp up to 2.5 mm <sup>2</sup>	GHG 571 7204 R1001	<b>GHG 571 7204 R1002</b>
110 V AC	2-pol + PE	4 h	Cage clamp	GHG 571 7604 R1001	<b>GHG 571 7604 R1002</b>
230 V AC	2-pol + PE	6 h	Crimp up to 1.5 mm <sup>2</sup>	GHG 571 7106 R1001	<b>GHG 571 7106 R1002</b>



with padlocking facility



Plastic



Metall

Ordering key eXLink plug 4-pole + PE

# GHG 574 7XXX RXX0X

1. Connection technology	2. Coding	3. Material	4. Accessories	5. Connecting cable Ø
1 = Crimp up to 1.5 mm <sup>2</sup> 2 = Crimp up to 2.5 mm <sup>2</sup> Option: Crimp up to 0.5 mm <sup>2</sup>	01 = 1 h 05 = 5 h 10 = 10 h	0 = Plastic 1 = Stainless steel AISI 316L 3 = Nickel-plated brass	0 = without padlocking facility 8 = with protection cap 9 = with padlocking facility	1 = 4 – 7.5 mm 2 = 7.5 – 11 mm

Ordering details

Voltage	No. of poles	Coding	Power connection	Connecting cable Ø	
				4 – 7.5 mm Order No.	7.5 – 11 mm Order No.
<b>Plug made of plastic</b>					
Ethernet/Bus	4 pol + PA	1 h	Crimp up to 1.5 mm <sup>2</sup>	<b>GHG 574 7101 R0001</b>	<b>GHG 574 7101 R0002</b>
24 V DC	4 pol + PE	5 h	Crimp up to 1.5 mm <sup>2</sup>	<b>GHG 574 7105 R0001</b>	<b>GHG 574 7105 R0002</b>
24 V DC	4 pol + PE	5 h	Crimp up to 2.5 mm <sup>2</sup>	<b>GHG 574 7205 R0001</b>	<b>GHG 574 7205 R0002</b>
230 V AC	4 pol + PE	10 h	Crimp up to 1.5 mm <sup>2</sup>	<b>GHG 574 7110 R0001</b>	<b>GHG 574 7110 R0002</b>
230 V AC	4 pol + PE	10 h	Crimp up to 2.5 mm <sup>2</sup>	<b>GHG 574 7210 R0001</b>	<b>GHG 574 7210 R0002</b>
<b>Plug made of nickel-plated brass</b>					
Ethernet/Bus	4 pol + PE	1 h	Crimp up to 1.5 mm <sup>2</sup>	<b>GHG 574 7101 R3001</b>	<b>GHG 574 7101 R3002</b>
24 V DC	4 pol + PE	5 h	Crimp up to 1.5 mm <sup>2</sup>	<b>GHG 574 7105 R3001</b>	<b>GHG 574 7105 R3002</b>
24 V DC	4 pol + PE	5 h	Crimp up to 2.5 mm <sup>2</sup>	<b>GHG 574 7205 R3001</b>	<b>GHG 574 7205 R3002</b>
230 V AC	4 pol + PE	10 h	Crimp up to 1.5 mm <sup>2</sup>	<b>GHG 574 7110 R3001</b>	<b>GHG 574 7110 R3002</b>
230 V AC	4 pol + PE	10 h	Crimp up to 2.5 mm <sup>2</sup>	<b>GHG 574 7210 R3001</b>	<b>GHG 574 7210 R3002</b>
<b>Plug made of stainless steel</b>					
Ethernet/Bus	4 pol + PE	1 h	Crimp up to 1.5 mm <sup>2</sup>	<b>GHG 574 7101 R1001</b>	<b>GHG 574 7101 R1002</b>
24 V DC	4 pol + PE	5 h	Crimp up to 1.5 mm <sup>2</sup>	<b>GHG 574 7105 R1001</b>	<b>GHG 574 7105 R1002</b>
24 V DC	4 pol + PE	5 h	Crimp up to 2.5 mm <sup>2</sup>	<b>GHG 574 7205 R1001</b>	<b>GHG 574 7205 R1002</b>
230 V AC	4 pol + PE	10 h	Crimp up to 1.5 mm <sup>2</sup>	<b>GHG 574 7110 R1001</b>	<b>GHG 574 7110 R1002</b>
230 V AC	4 pol + PE	10 h	Crimp up to 2.5 mm <sup>2</sup>	<b>GHG 574 7210 R1001</b>	<b>GHG 574 7210 R1002</b>