


■ Built-in components ■

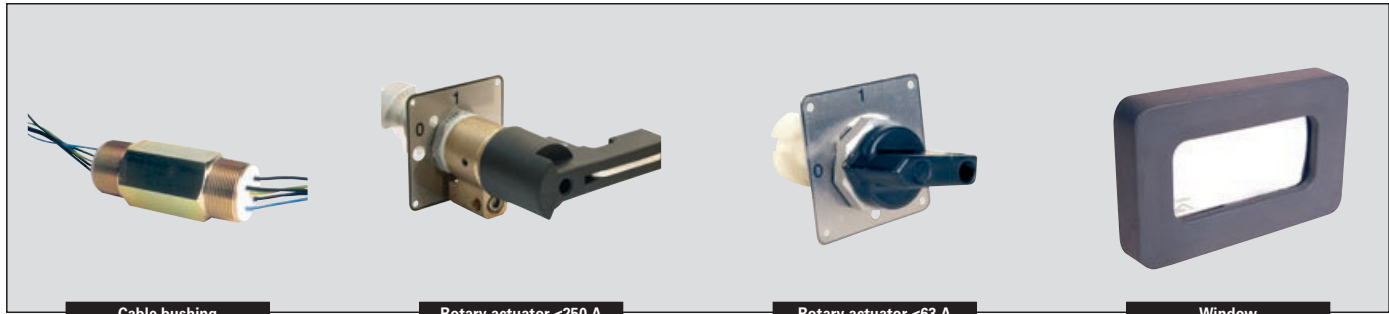

Cable bushing

Rotary actuator <250 A

Rotary actuator <63 A

Window

Technical data

Window

Marking accd. to 94/9/EC	⊕ II 2 G Ex d IIB
EC-Type Examination Certificate	LOM 02 ATEX 3060 U
Application temperature ¹⁾	-20 °C up to +40 °C
Degree of protection accd. to EN 60529	IP65
Dimensions (L x H x W)	60 x 60 mm
	75 x 75 mm
	110 x 50 mm
	110 x 75 mm
Enclosure material	frame material aluminium
	window material borosilicate glass
Enclosure colour	epoxy resin finish, grey


Rotary actuator

Marking accd. to 94/9/EC	⊕ II 2 G Ex d IIB
EC-Type Examination Certificate	LOM 02 ATEX 3060 U
Application temperature ¹⁾	-20 °C up to +40 °C
Rated voltage	500 V
Rated current	25 A
	63 A
	250 A
	500 A
Degree of protection accd. to EN 60529	IP65
Enclosure material	Aluminium
Enclosure colour	stainless steel finish
Options	Locking facility for units up to 40 A. on front panel, for units > 40 A on enclosure panel.

Cable bushing

Marking accd. to 94/9/EC	⊕ II 2 G Ex d IIB
EC-Type Examination Certificate	LOM 02 ATEX 3060 U
Application temperature ¹⁾	-20 °C up to +40 °C
Rated voltage	690 V
Rated current	50 A
	75 A
	150 A
Size	4 x 10 mm ² + 1 x 6 mm ² up to zu 9 x 1.5 mm ² + depends on use (50 A)
	4 x 16 mm ² + 1 x 10 mm ² up to zu 9 x 1.5 mm ² + depends on use (75 A)
	4 x 50 mm ² + 1 x 10 mm ² up to zu 47 x 1.5 mm ² + depends on use (150 A)
Degree of protection accd. to EN 60529	IP65
Material	bichromatised hexagonal steel
Cable sealing	high-thermal and chemical-resistant compound

¹⁾ Depend on installation

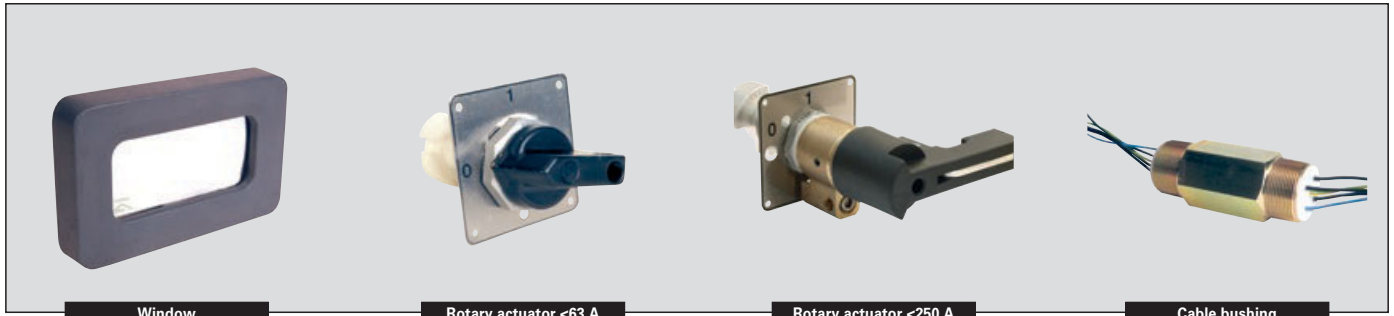

Window

Rotary actuator <63 A

Rotary actuator <250 A

Cable bushing

Ordering details

Description	Order No.
Rotary switch	
Rotary switch, 1-0-2, 2 P, 12 A	NOR 000 001 170 026
Rotary switch, 0-1, 2 P, 12 A	NOR 000 001 170 027
Rotary switch, 0-1-M, 2 P, 12 A	NOR 000 001 170 028
Rotary actuator for main switch:	
Main switch, 25 A up to < 63 A	NOR 000 001 170 029
Main switch, 63 A up to < 100 A	NOR 000 001 170 030
Main switch, 100 A up to < 250 A	NOR 000 001 170 031
Main switch, 250 A up to < 1000 A	NOR 000 001 170 032
Plain labels for switch	
Plain labels for switch, 60 x 60	NOR 000 001 170 033
Plain labels for switch, 70 x 70	NOR 000 001 170 034
Plain labels for switch, 85 x 85	NOR 000 001 170 035
Rotary actuator for MCBs	
Rotary actuator for MCBs 1-pole ABB	NOR 000 001 170 933
Rotary actuator for MCBs Multipole ABB	NOR 000 001 170 925
Rotary actuator for MCBs 1-pole M&G	NOR 000 001 170 600
Rotary actuator for MCBs Multipole M&G	NOR 000 001 170 569
Rotary actuator for MCBs POWER	NOR 000 001 170 565
Cable bushing	
50 A 4 x 10 mm ² + 1 x 6 mm ²	3/4" NPT 3P+N+PE NOR 000 001 170 892
75 A 4 x 16 mm ² + 1 x 10 mm ²	1" NPT 3P+N+PE NOR 000 001 170 909
150 A 4 x 50 mm ² + 1 x 10 mm ²	1 1/2" NPT 3P+N+PE NOR 000 001 170 917
Window	
60 x 60 mm, Type M 6060	NOR 000 001 170 000
75 x 75 mm, Type M 7575	NOR 000 001 170 001
110 x 50 mm, Type M 11050	NOR 000 001 170 002
110 x 75 mm, Type M 11075	NOR 000 001 170 003
Blanking plug	
Blanking plug	NOR 000 001 170 154